


JT SSh 385-405W

Dual-glass Monocrystalline Solar Module

144 Cells / MBB / Mono PERC / 1500V DC / 19.7% Maximum Efficiency

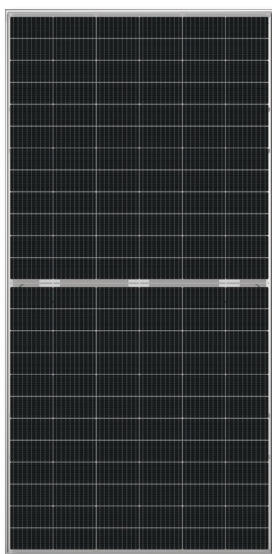

KEY FEATURES



Ultra-high power output

MBB mono PERC cell technology, maximum power output 405W
Half-cut cell layout, lower Rs loss and thermal coefficients



Ultra-high reliability

Dual-galss design with POE encapsulant, no PID risk
100% EL double inspection, stringent internal quality control



Excellent low light performance

Excellent low light performance on cloudy days
mornings and evenings



Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h



High system voltage Compatible

Maximum 1500V DC system voltage saves total system cost



High fire class

Fire class A certified, minimize the fire risk of the system

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- OHSAS 18001: Occupational Health and Safety

JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 5 GW module shipment and 1 GW global EPC track records.

WARRANTY




Product
Warranty



Performance
Warranty

Insured by

Munich RE 

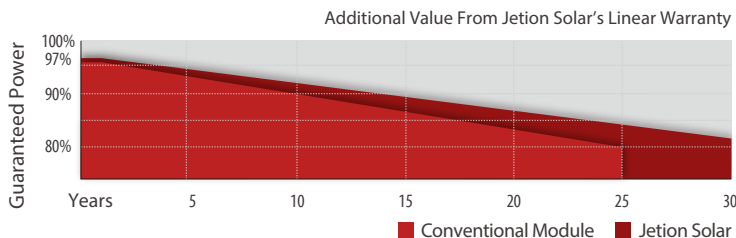

Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443



Tel: +86 (510) 8668 7300

E-mail: marketing@jetion.com.cn

Web: www.jetion.com.cn



IV CURVES

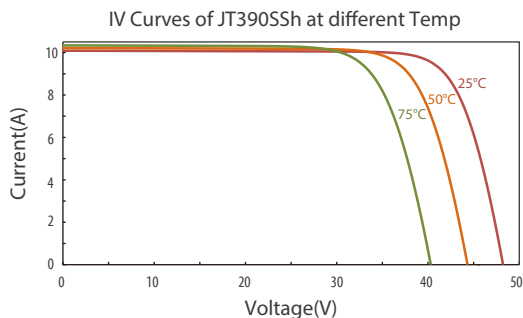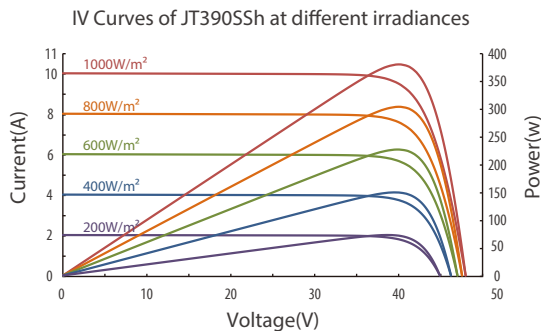

ELECTRICAL DATA *STC

TYPE (Tolerance: 0 - +5W)	JT385SSh	JT390SSh	JT395SSh	JT400SSh	JT405SSh
Maximum Power Pmax (W)	385	390	395	400	405
Maximum Power Voltage Vmp (V)	40.2	40.5	40.7	41.0	41.2
Maximum Power Current Imp (A)	9.58	9.64	9.71	9.76	9.83
Open Circuit Voltage Voc (V)	49.0	49.3	49.5	49.8	50.0
Short Circuit Current Isc (A)	9.97	10.03	10.09	10.15	10.22
Module Efficiency (%)	18.8%	19.0%	19.2%	19.5%	19.7%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

ELECTRICAL DATA *NMOT

Maximum Power Pmax (W)	288.41	292.60	296.81	301.07	305.18
Maximum Power Voltage Vmp (V)	37.7	38.0	38.2	38.5	38.7
Maximum Power Current Imp (A)	7.65	7.70	7.77	7.82	7.88
Open Circuit Voltage Voc (V)	46.1	45.8	46.5	46.8	47.0
Short Circuit Current Isc (A)	8.04	8.10	8.16	8.22	8.29

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.05%/°C
Temperature Coefficient of Voc (βVoc)	-0.30%/°C
Temperature Coefficient of Pmax (γPmp)	-0.37%/°C
Normal Module Operating Temperature (NMOT)	41°C±3°C

OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ
Voc and Isc Tolerance	±3%


MECHANICAL DATA

Solar Cell Type	Mono 79.375×158.75 mm(3.13×6.25 inches)
Number of Cells	144 [2 x (12 x 6)]
Module Dimensions	2043×1005×25 mm(80.4×39.6×1.0 inches)
Weight	25.5 kg(56.2 lb)
Front Cover	2.0 mm (0.08 inches), high transmission, AR coated tempered glass
Back Cover	2.0 mm (0.08 inches), high transmission, AR coated tempered glass
Frame	Silver, anodized aluminium alloy
J-Box	≥IP67
Cable	4.0 mm ² solar cable, 300 mm(11.8 inches)
Number of diodes	3
Connector	MC4 EVO2 compatible

PACKAGING CONFIGURATION

Module per pallet	26 pieces
Module per 40'HQ container	20 pallets, 520 pieces

DIMENSION

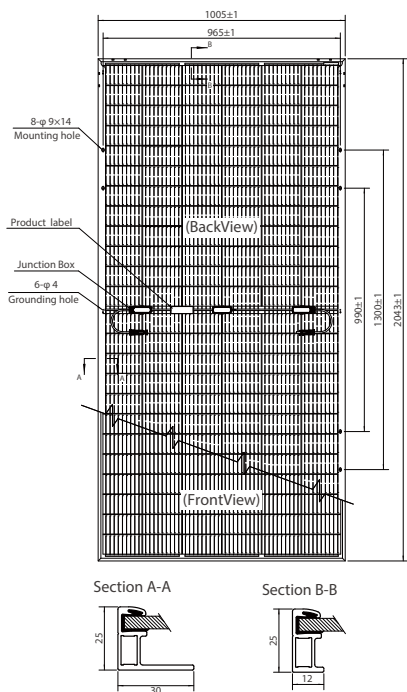

Remarks

*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.
 *The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jetion Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Jetion Solar_REV_2020_02_EN

